


ライトシリーズ TAS 3051 性能・寸法

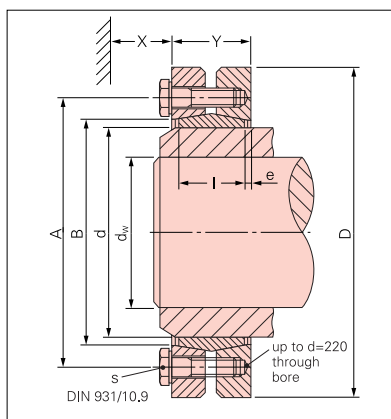

形式(例)

L-400×460 または TAS 3051-460

ボスの
外径d

軸の外径dw

軸、ボスの表面あらし: 16 μ m以下 (R_{max} 12.5S)

H、eは締付け前の寸法

Xはトルクレンチ使用上の最小スペース (P. 68 参照)

軸径 dw mm	ボスの外径 d mm	許容伝達 トルクMt kNm (kgf·m)	寸 法 mm						締付ボルト			重量 kg
			D	I	H	A	B	e	締付トルクM _A Nm (kgf·m)	ねじ寸法	本数	
95 100 105	125	11.5 (1150) 13.0 (1300) 14.5 (1450)	185	39	52	158	129	6	59 (5.9)	M10× 40	8	6
110 120 125	140	16.0 (1600) 20.0 (2000) 22.0 (2200)	220	39	52	175	144	6	59 (5.9)	M10× 40	9	8
130 135 140	155	25.0 (2500) 28.8 (2880) 32.5 (3250)	245	39	52	192	159	6	59 (5.9)	M10× 40	11	10
135 140 145	165	32.0 (3200) 35.5 (3550) 39.0 (3900)	260	46	62	210	169	8	100 (10)	M12× 50	10	14
145 150 155	175	3.90 (3900) 43.0 (4300) 47.0 (4700)	275	46	62	220	179	8	100 (10)	M12× 50	11	16
155 160 165	185	49.0 (4900) 53.0 (5300) 57.0 (5700)	295	46	62	225	189	8	100 (10)	M12× 50	12	20
165 170 175	195	66.0 (6600) 71.0 (7100) 76.0 (7600)	315	56	72	237	199	8	100 (10)	M12× 55	15	27
180 190 200	220	88.0 (8800) 101 (10100) 114 (11400)	345	66	84	265	224	9	250 (25)	M16× 65	10	35
200 210 215	240	120 (12000) 134 (13400) 141 (14100)	370	66	84	290	244	9	250 (25)	M16× 65	12	44
220 230 235	260	144 (14400) 159 (15900) 167 (16700)	395	72	92	310	265	10	250 (25)	M16× 70	14	48
230 240 250	280	170 (17000) 190 (19000) 210 (21000)	425	84	104	333	285	10	250 (25)	M16× 75	16	60
250 260 270	300	213 (21300) 234 (23400) 255 (25500)	460	84	104	358	305	10	250 (25)	M16× 75	18	75
270 280 290	320	264 (26400) 285 (28500) 301 (30100)	495	84	106	378	325	11	250 (25)	M16× 75	20	84
290 300 305	340	318 (31800) 345 (34500) 359 (35900)	535	84	106	402	345	11	250 (25)	M16× 75	21	100
300 310 320	360	318 (31800) 410 (41000) 438 (43800)	555	100	122	423	365	11	490 (49)	M20× 90	16	125
330 340 350	390	510 (51000) 543 (54300) 576 (57600)	595	112	136	452	397	12	490 (49)	M20×100	20	156
350 360 370	420	590 (59000) 630 (63000) 670 (67000)	630	120	144	485	427	12	490 (49)	M20×100	22	185
390 400 410	460	770 (77000) 860 (86000) 950 (95000)	685	132	158	527	468	13	490 (49)	M20×100	28	235

※410×460以上の寸法のもの、お問合せください。