


コネクションフランジFK型性能・寸法

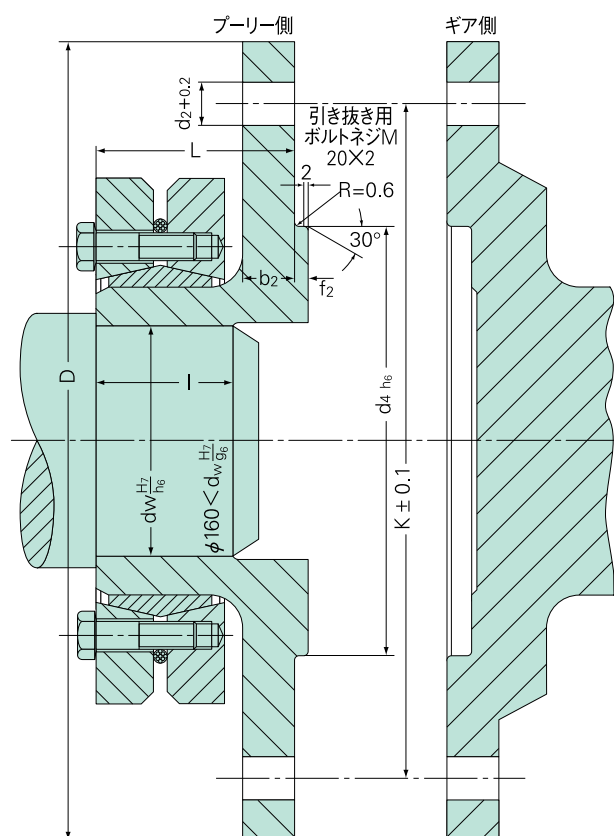

形式(例)

TAS-FK-400/100-105RAG

軸の外径 d_w

型番

軸の表面あらし: $16\mu\text{m}$ 以下 ($R_{\text{max}} 12.5\text{S}$)

型番	軸径 d_w mm	許容伝達トルク M_t kNm (kgf·m)	曲げモーメント $M_b \text{ max.}$ Nm (kgf·m)	フランジ									クランプカラー (スタンダード) ボスの外径 d mm	重量 kg
				D mm	K mm	d_4 mm	L mm	I mm	b_2 mm	f_2 mm	d_2 mm	ボルト数		
FK-400/100	95 100 105	15.1 (1510) 17.6 (1760) 20.1 (2010)	5500 (550)	400	350	300	104	55	30	6	25	8	140	45
FK-400/110	105 110 115	22.0 (2200) 25.0 (2500) 28.0 (2800)	7500 (750)	400	350	300	108	59	30	6	25	8	155	52
FK-400/120	115 120 125	31.0 (3100) 35.0 (3500) 39.0 (3900)	9000 (900)	400	350	300	114	65	30	6	25	8	165	59
FK-400/130	125 130 140	40.0 (4000) 44.0 (4400) 52.0 (5200)	12000 (1200)	400	350	300	114	73	30	6	25	8	175	60
FK-560/150	145 150 155	72.0 (7200) 78.0 (7800) 84.0 (8400)	18000 (1800)	560	480	280	139	81	36	8	31	16	200	125
FK-560/170	160 165 170	100 (10000) 108 (10800) 116 (11600)	22000 (2200)	560	480	280	157	98	36	8	31	16	220	140
FK-560/180	170 180 190	120 (12000) 138 (13800) 156 (15600)	30000 (3000)	560	480	280	161	104	36	8	31	16	240	160
FK-630/200	190 200 210	164 (16400) 184 (18400) 204 (20400)	40000 (4000)	630	550	350	188	115	40	8	31	18	260	200
FK-630/220	210 220 230	217 (21700) 245 (24500) 273 (27300)	52000 (5200)	630	550	350	196	126	40	8	31	18	280	220
FK-630/240	230 240 245	262 (26200) 293 (29300) 308 (30800)	66000 (6600)	630	550	350	204	136	40	8	31	18	300	240
FK-710/260	250 260 270	394 (39400) 430 (43000) 466 (46600)	85000 (8500)	710	630	550	220	148	40	8	31	24	340	360