


2パーツ型 TAS 3181型(準高トルク)

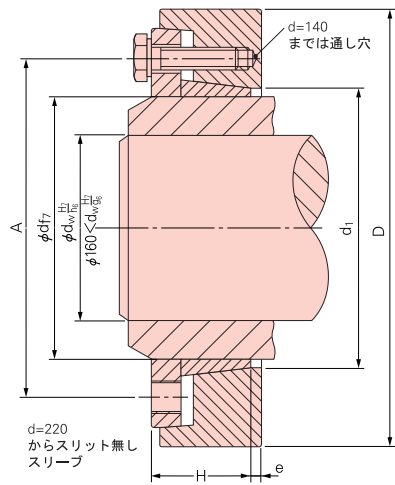

形式(例)

TAS3181-120×165 または TAS 3181-165

ボスの
外径d

軸の外径dw

H、eは締付け前の寸法

軸径 dw mm	ボスの外径 d mm	許容伝達 トルクMt kNm (kgf·m)	寸 法 mm						締付ボルト			重量 kg
			D	H	I	e	d ₁	A	締付トルクM _A Nm (kgf·m)	ねじ寸法	本数	
38 40 42	50	1.50 (150) 1.70 (170) 1.90 (190)	90	27	24	3	53	68	35 (3.5)	M 8×20	7	0.8
42 45 48	55	1.60 (160) 2.00 (200) 2.40 (240)	100	29	26	3	58	72	35 (3.5)	M 8×20	8	1.1
48 50 52	62	2.20 (220) 2.40 (240) 2.70 (270)	110	29	26	3	66	80	35 (3.5)	M 8×20	8	1.3
50 55 60	68	2.30 (230) 3.00 (300) 3.70 (370)	115	29	26	3	72	86	35 (3.5)	M 8×20	9	1.4
55 60 65	75	3.70 (370) 4.60 (460) 5.50 (550)	138	31	27	4	84	100	70 (7.0)	M10×25	8	2.4
60 65 70	80	4.20 (420) 5.20 (520) 6.30 (630)	138	31	27	4	84	100	70 (7.0)	M10×25	8	2.3
65 70 75	90	5.90 (590) 7.10 (710) 8.40 (840)	155	38	34	4	94	114	70 (7.0)	M10×30	10	3.3
70 75 80	100	7.40 (740) 8.80 (880) 10.30 (1030)	170	43	39	4	104	124	70 (7.0)	M10×30	12	4.5
80 85 90	110	12.60 (1260) 14.60 (1460) 16.90 (1690)	185	49	44	5	114	136	120 (12)	M12×30	10	6.1
90 95 100	125	16.30 (1630) 18.70 (1870) 21.20 (2120)	215	54	48	6	134	160	120 (12)	M12×35	12	9.0
100 105 110	140	20.50 (2050) 23.50 (2350) 29.50 (2950)	230	58	52	6	145	173	190 (19)	M14×40	10	11.0
110 115 120	155	30.80 (3080) 34.20 (3420) 37.80 (3780)	263	62	56	6	165	190	190 (19)	M14×40	12	15.6
120 125 130	165	43.90 (4390) 48.30 (4830) 52.90 (5290)	290	68	61	7	175	204	290 (29)	M16×45	10	22.0
130 135 140	175	53.40 (5340) 58.20 (5820) 63.30 (6330)	300	68	60	8	185	214	290 (29)	M16×50	12	23.0
140 145 150	185	75.50 (7550) 82.00 (8200) 89.00 (8900)	330	85	77	8	195	224	290 (29)	M16×50	14	36.0
150 155 160	200	95.50 (9550) 102.00 (10200) 110.00 (11000)	350	85	77	8	205	240	290 (29)	M16×50	16	40.0

2パーツ型 TAS 3181型(準高トルク)

軸径 dw mm	ボスの外径 d mm	許容伝達 トルクMt kNm (kgf·m)	寸 法 mm						締付ボルト			重量 kg
			D	H	I	e	d ₁	A	締付トルクM _A Nm (kgf·m)	ねじ寸法	本数	
160 165 170	220	125 (12500) 134 (13400) 145 (14500)	370	103	94	9	226	270	570 (57)	M20×60	16	53.0
170 180 190	240	151 (15100) 172 (17200) 194 (19400)	405	107	97	10	246	296	570 (57)	M20×60	18	66.0
190 200 210	260	200 (20000) 226 (22600) 255 (25500)	430	119	109	10	266	318	570 (57)	M20×60	21	81.0
210 220 230	280	265 (26500) 295 (29500) 328 (32800)	460	134	124	10	287	340	570 (57)	M20×60	22	102.0
220 230 240	300	332 (33200) 367 (36700) 405 (40500)	485	142	132	10	307	360	980 (98)	M24×70	20	118.0
240 250 260	320	370 (37000) 410 (41000) 445 (44500)	520	143	133	10	327	380	980 (98)	M24×80	21	137.0
250 260 270	340	480 (48000) 525 (52500) 575 (57500)	570	158	146	12	348	402	980 (98)	M24×80	22	189.0
270 280 290	360	610 (61000) 663 (66300) 720 (72000)	590	162	150	12	368	424	980 (98)	M24×80	24	202.0
290 300 310	390	781 (78100) 842 (84200) 906 (90600)	650	166	152	14	398	458	1450 (145)	M27×80	18	250.0
320 330 340	420	912 (91200) 980 (98000) 1050 (105000)	690	186	177	15	430	495	1450 (145)	M27×80	21	314.0
340 350 360	440	1160 (116000) 1240 (124000) 1320 (132000)	740	196	181	15	450	518	1450 (145)	M27×80	24	389.0
360 370 380	460	1360 (136000) 1445 (144500) 1530 (153000)	770	196	181	15	470	538	1450 (145)	M27×80	25	430.0
380 390 400	480	1600 (160000) 1700 (170000) 1800 (180000)	800	216	201	15	490	558	1450 (145)	M27×80	27	514.0
400 410 420	500	1840 (184000) 1950 (195000) 2050 (205000)	850	216	201	15	510	580	1450 (145)	M27×80	28	590.0

※420×500以上の寸法の場合は、お問合せください。